



09/06/17 (Rev)

## FTDX3000 Software Update and Version Identification

The latest versions are listed below with the release dates.

- MAIN Software Version **01-23** (09/06/17)
- DSP Software Version **05-55** (01/26/16)
- TFT Software Version **01-09** (07/14/15)

\*If you already have the above listed firmware versions, it is not necessary to update the FTDX3000 again.

There are four different Software installations. Each one must be followed carefully. Installing the wrong type software may cause difficulties. Check your radio before installing software to be sure which updates are needed.


If multiple software installations are required the **MAIN** software should be installed first, as it is the only one that requires a press and hold in the [FAST] and [LOCK] keys while turning the radio back on. This resets the radio and locks in the new software.

Before installing new firmware, please verify your current version firmware with the following procedure:

### **How to Confirm the Firmware Version**

Press and hold the [POWER] key to turn on the transceiver, while pressing and holding the [GEN] key, [50] key, and [ENT] key on the transceiver's main panel.

The versions of each firmware will be displayed on the TFT screen.

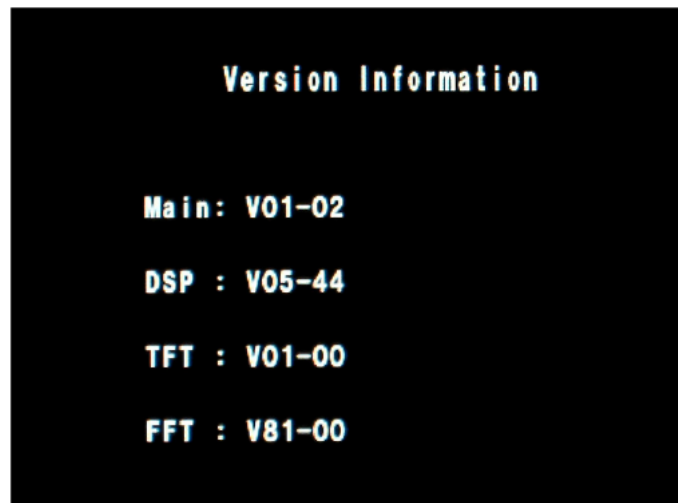

(This image & version is for illustration only)

Download the FTDX3000 data and [FTDX3000\_MAIN\_V0123.zip] from the following website:  
<http://www.yaesu.com/indexVS.cfm?cmd=DisplayProducts&ProdCatID=102&encProdID=721B3F7D596827E0B37BD528EE1A56F1&DivisionID=65&isArchived=0>

*The zip file contains all of the current software versions. Please verify which version software is already on your radio before updating. If you have each of the listed versions, you do not need to update the radio again.*

**Please read the FTDX3000 Firmware Upgrade Manual before proceeding!**

### **Implements improvements**

#### **MAIN Firmware Version 0123** (09/06/17)

- Provides operation on the 5 MHz amateur band.

**\* The 5 MHz amateur band is updated for the FTDX3000 as follows:**

#### **US / EXP / CHN / AUS versions**

1. By pressing and holding the band key [14/5], the 5 MHz band can now be selected.
2. The three 5 MHz band stacks are called up by successively pressing and holding the [14/5] Band Key.  
(Transmission/Reception operation in 5 MHz band in each version does not change)

#### **UK version transceiver which can transmit 5 MHz in USB mode**

1. By pressing and holding the band key [14/5], the 5 MHz band can now be selected.
2. The three 5 MHz band stacks are called up by successively pressing and holding the [14/5] Band Key.
3. VFO operation Transmit in all modes is now possible at frequencies of 5.250.0MHz - 5.406.5MHz.

#### **EU transceiver which can not currently transmit 5 MHz**

1. By pressing and holding the band key [14/5], the 5 MHz band can now be selected.
2. The three 5 MHz band stacks are called up by successively pressing and holding the [14/5] Band Key.
3. 5.351.5MHz - 5.366.5MHz frequencies, VFO operation Transmit in all modes is now possible.

#### **NOTE:**

\*For the 5 MHz band, please operate according to Regulation of each country and license of customer.

\*After updating the firmware for the 5 MHz amateur radio band; please reset the transceiver using the following the procedure.

1. Press and hold the [POWER] key on the front panel to turn the transceiver ON.
2. While the transceiver is ON, disconnect the DC power cable from the DC-IN connector on the rear panel and turn the transceiver OFF.
3. Press and hold the [FAST] and [LOCK] keys on the front panel, connect the power cable into the DC-IN connector on the rear panel and turn the transceiver ON.

We hope this new firmware will increase your enjoyment of your FTDX3000. Thank you for choosing Yaesu radios. If you have any problems or questions, please contact Yaesu, Amateur Tech Support [amateurtech@yaesu.com](mailto:amateurtech@yaesu.com).

Best regards,

**Mikio Maruya, WA6F**  
Executive Vice President  
Engineering & Customer Service  
Yaesu USA