


# About added [PRESET] function


Multiple settings required for FT8 operation can now be made with one touch of [PRESET] on the MODE selection screen. Touch [PRESET] again, the [PRESET] settings are canceled and the original settings are restored.

## Set up for FT8 operation

1. Touch the operation mode area, or press the [MODE] key.

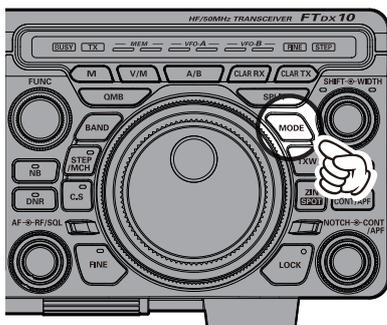

2. The operation MODE selection screen appears on the display, then touch [PRESET], or rotate the MPVD ring to select [PRESET].  
Touch [PRESET] or select [PRESET] via the MPVD ring, the settings will be confirmed for about 1 second and then the operating screen will return.
3. Touch [PRESET] again, the [PRESET] settings are canceled and the original settings are restored.

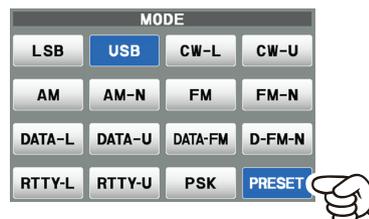

The color of the [PRESET] shows the current state.

Blue: Enable the [PRESET] settings

Gray: Disable the [PRESET] settings

## Change the [PRESET] setting

The settings of the 14 items in the table below are registered in [PRESET]. These settings may be changed as needed:

Function	Available Settings (Default: Bold)
CAT RTS	<b>OFF</b> / ON
CAT RATE	4800bps / 9600bps / 19200bps / <b>38400bps</b>
CAT TIME OUT TIMER	<b>10msec</b> / 100msec / 1000msec / 3000msec
LCUT FREQ	OFF / <b>100Hz</b> - 1000Hz (50Hz/step)
HCUT FREQ	700Hz - <b>3200Hz</b> - 4000Hz (50Hz/step) / OFF
TX BPF SEL	<b>50-3050Hz</b> / 100-2900Hz / 200-2800Hz / 300-2700Hz / 400-2600Hz
REAR SELECT	DATA / <b>USB</b>
RPORT GAIN	0 - <b>10</b> - 100
RPTT SELECT	DAKY / <b>RTS</b> / DTR
AGC FAST DELAY	20msec - <b>160msec</b> - 4000msec (20msec/step)
AGC MID DELAY	20msec - <b>500msec</b> - 4000msec (20msec/step)
AGC SLOW DELAY	20msec - <b>1500msec</b> - 4000msec (20msec/step)
LCUT SLOPE	6dB/oct / <b>18dB/oct</b>
HCUT SLOPE	6dB/oct / <b>18dB/oct</b>

1. Touch and hold [PRESET], the operation mode selection screen appears on the display.
2. Touch the desired item, or rotate the [FUNC] knob to select the desired item, then press the [FUNC] knob.
3. Rotate the [FUNC] knob, or touch "<" or ">" on either side of the value setting that is to be changed.
4. Press the [FUNC] knob or leave it for about 3 seconds to save the new settings.
5. Touch [BACK] to return to the operation MODE selection screen. After about 2 seconds, the operation screen will return.

