

AIR-BAND TRANSCEIVERS



SPIRIT Series
FTA-720



Pilot Series
FTA-310



Pro Series
FTA-230



SPIRIT Series FTA-720

- BNC Antenna Connector
- Air Band (108 MHz - 137 MHz) including NAV (108 MHz - 118 MHz) AM 5 W P.E.P. (1.5 W Carrier)
- Wide-Band FM Broadcast Receive 88 MHz - 108 MHz
- VOR Navigation Display
- US BRS Band Reception with CTCSS/DCS Decoder
- NOAA Weather Channel Receive (U.S.A. Only)
- NOAA Weather Alert (U.S.A. Only)
- Rugged Magnesium Die-Cast Construction
- Submersible IPX7 (3 ft. 30 minutes)
- Long-Life Lithium-Ion Battery included
- RX Battery Saver Mode
- 160 Memories with Pre-programmed BOOK Memories
- Multi-Color Strobe LED for Status Indication and Emergency Light in Dark
- Back-lit Keypad and Display with Dimmer
- One-Touch Emergency Frequency Access(121.5 MHz)

Air Band Operation, VOR Navigation, FM Broadcast and US BRS Band Reception included

The multiple capabilities of the FTA-720 yield unmatched operating and monitoring opportunities for the owner on the go! Besides full voice transmit and receive operation on the Air Band, the FTA-720 also provides extensive VOR and CDI Navigation tools, along with convenient reception of the FM Broadcast band during down time. And you get the additional monitoring excitement afforded by receiver coverage of the Business Radio Service (BRS) band, a YAESU exclusive!

Rugged Magnesium Die-Cast Construction


The unmatched ruggedness of the FTA-720 is coupled with ultra-light weight, thanks to the die-cast magnesium case and chassis construction. Rubber bumpers on the bottom corners of the case protect it against damage from every-day bumps and scrapes.

Supplied Rechargeable Lithium-Ion Battery

The FTA-720 is supplied with a super-long-life 7.4 V, Typ. 1500 mAh Lithium-Ion Battery Pack (FNB-80LI), providing many hours of operation and reliable charging without the "memory" effects that can plague other battery types. With the optional CD-15A Charging Stand and PA-48B/C/U* AC Adapter, the FNB-80LI may be charged in as little as 3 hours, so you'll quickly be ready for more operating action!

Dot Matrix Display

The FTA-720's 132 x 64 dot matrix display provides clear, easy to ready indication of frequency and Navigation data, the FTA-720's display includes an unparalleled array of graphical and pictorial tools to simplify operation in flight.

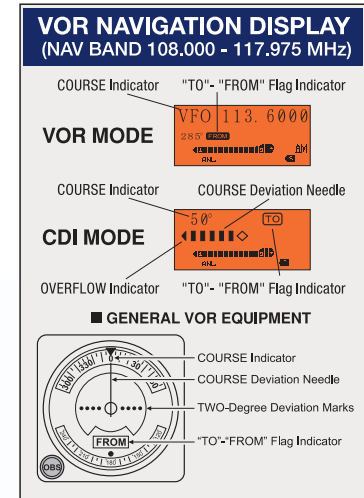

SUPPLIED ACCESSORIES:

- Li-ion Battery Pack (7.4 V, Typ. 1500 mAh) FNB-80LI •Battery Charger PA-48B/C/U* •BNC Helical Antenna YHA-74 •Headset Cable CT-96

ACCESSORIES & AVAILABLE OPTIONS

| | | |
|--|--|--|
| | | |
| | | |

* "B": for 120VAC / "C": for 220-240 VAC / "U": for 220-240 VAC w/UK Plug.



Pilot Series FTA-310

- BNC Antenna Connector
- 5 Watts TX Output Power (at 7.2 V. 5 W P.E.P. typ., 1.5 W carrier)
- Loud Audio (800 mW)
- VOR Navigation Display
- 250 Memory Channels (Incl. Pre-Programmed Book Memory Channels)
- Receiver Audio Pitch Control
- 8 Character Alpha Numeric Display
- Back-lit Keypad and Display with Dimmer
- One Touch Emergency Frequency Access (121.5 MHz)
- Rugged and Submersible Construction IPX7 (3 feet /1 m for 30 minutes)
- NOAA Weather Channel Receive (U.S.A. Only)
- NOAA Weather Alert (U.S.A. Only)
- RX Battery Saver
- VOX Operation (Voice-activated Transmit/Receive switching)
- Supplied with 12 V DC Charging Sleeve for in-flight operation
- PC Programmable

ULTRA RUGGED, SUBMERSIBLE CASE CONSTRUCTION

The FTA-310 is built inside a rugged Aluminum case, carefully sealed to protect against water ingress. Built to survive immersion in water for up to 30 minutes at a depth of three feet, the FTA-310 can keep you communicating even if it gets wet if you have to ditch!

RECEIVER AUDIO PITCH CONTROL

For improved reception under difficult conditions, the receiver's audio frequency response may be quickly adjusted by the user, to enhance either the high-frequency or low-frequency components, depending on the noise and/or interference encountered. A YAESU exclusive!

ONE TOUCH SQUELCH CONTROL


Breaking the squelch threshold has never been easier. Press the monitor (MON) button for two seconds to open the FTA-310's squelch continuously. Press MON again to restore the original squelch settings. This is TRUE one-handed operation, without the need to fumble around with tightly spaced concentric knobs.

NOAA WEATHER CHANNELS (U.S.A. Only)

The FTA-310 can receive all 10 NOAA weather broadcast frequencies. The Automatic Active Weather Channel Locator (a YAESU exclusive) automatically scans for active NOAA weather stations in your area when WX band is selected.

VERSATILE SCANNING FEATURES

The FTA-310's versatile scanning capability allows you to monitor a number of different channels efficiently. The FTA-310 will scan the COM band, main or Book memories, or the Weather band (U.S. A. Only), and also includes provision for Dual Watch and Priority Revert Dual Watch that always ensures transmission on a "Priority" channel.

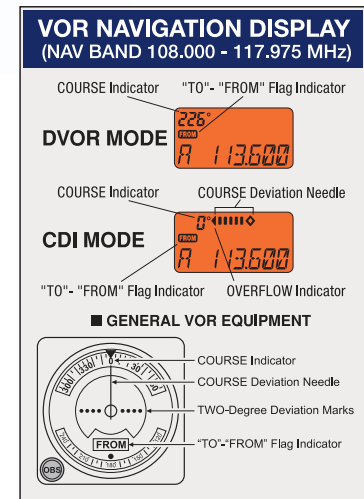

SUPPLIED ACCESSORIES:

- Ni-MH Battery Pack (7.2V, 1400mAh) FNB-83 •Battery Charger PA-48B/C/U* •Charger Cradle CD-28 •DC Sleeve Charger CD-59 •BNC Helical Antenna YHA-73 •Quick Draw Belt Clip CLIP-14 •Headset Cable CT-96 •Alkaline Battery Case FBA-25A

ACCESSORIES & AVAILABLE OPTIONS

| | | |
|--|--|--|
| | | |
| | | |

* "B": for 120VAC / "C": for 220-240 VAC / "U": for 220-240 VAC w/UK Plug.



Pro Series FTA-230

- BNC Antenna Connector
- 5 Watts TX Output Power (at 7.2 V. 5 W P.E.P. typ., 1.5 W carrier)
- Loud Audio (700 mW)
- 250 Memory Channels (Incl. Pre-Programmed Book Memory Channels)
- Last Channel Recall (Flip Flop) Function
- 8 Character Alpha Numeric Display
- Back-lit Keypad and Display with Dimmer
- One Touch Emergency Frequency Access (121.5 MHz)
- Rugged and Submersible Construction IPX7 (3 feet/1 m for 30 minutes)
- NOAA Weather Channel Receive (U.S.A. Only)
- NOAA Weather Alert (U.S.A. Only)
- RX Battery Saver
- VOX Operation (Voice-activated Transmit/Receive switching)
- Supplied with 12 V DC Charging Sleeve for in-flight operation
- PC Programmable

Rugged and Submersible Construction IPX7 (3 feet/1 m for 30 minutes)

The FTA-230 is built inside a rugged Aluminum case, carefully sealed to protect against water ingress. Built to survive immersion in water for up to 30 minutes at a depth of three feet, FTA-230 can keep you communicating even if it gets wet due to severe weather or unforeseen water landings.

Back-lit Keypad and Display with Dimmer

For quick access to operating frequencies, simply enter the frequency information directly from the 17 button keypad, then press the "Push To Talk" (PTT) button to transmit. There is no need to store frequencies in memory before operating.

NOAA Weather Channel Receive (U.S.A. Only)

The FTA-230 can receive all 10 NOAA weather broadcast frequencies. The Automatic Active Weather Channel Locator (a YAESU exclusive) automatically scans for active NOAA weather stations in your area when WX band is selected.

NOAA Weather Alert (U.S.A. Only)

The FTA-230 includes a special feature that sounds an alarm when the special "Severe Weather" alert tone is received from a Weather Broadcast station. This warns you of potentially hazardous flying conditions.

One Touch Emergency Frequency (121.5 MHz) Access

For lightning-fast access to the 121.5 MHz Emergency Frequency, a dedicated key on the front panel assures you of no delays in summoning help in an emergency.

3-WAY DISPLAY TITLING AND BACK-LIT DISPLAY

Easy to use, versatile access to channel information is critical to successful transceiver operation. Only YAESU Airband transceivers offer you one-keystroke access to three different methods of displaying memory channel information: Frequency, Channel Number, or Alpha-Numeric title.

SUPPLIED ACCESSORIES:

- Ni-MH Battery Pack (7.2V, 1400mAh) FNB-83 •Battery Charger PA-48B/C/U* •Charger Cradle CD-32 •DC Sleeve Charger CD-59 •BNC Helical Antenna YHA-73 •Headset Cable CT-96 •Alkaline Battery Case FBA-25A

ACCESSORIES & AVAILABLE OPTIONS

| | | |
|--|--|--|
| | | |
| | | |

* "B": for 120VAC / "C": for 220-240 VAC / "U": for 220-240 VAC w/UK Plug. *1 Requires PA-43B/C/U*

| Specifications | <i>SPiRiT Series FTA-720</i> | <i>PiLot Series FTA-310</i> | <i>Pro Series FTA-230</i> |
|------------------------------|--|---|---|
| General | | | |
| Frequency range | TX: 118.000 - 136.975 MHz (COM Band) RX: 88.000 - 108.000MHz (FM BC Band) 108.000 - 117.975 MHz (NAV Band) 118.000 - 136.975 MHz (COM Band) 151.5125 - 158.400MHz (BRS Channels) Weather Channels (WX-01 - WX-10:USA version only) | TX: 118.000 -136.975 MHz RX: 108.000 - 117.975 MHz (NAV Band) 118.000 - 136.975 MHz (COM Band) Weather Channels (WX-01 - WX-10:USA version only) | TX: 118.000 - 136.975 MHz RX: 108.000 - 136.975 MHz Weather Channels (WX-01 - WX-10: USA version only) |
| Channel Spacing | 5/10/12.5/15/20/25/50/100 kHz | 25 kHz/8.33 kHz (8.33 kHz: RX only) | 25 kHz / 8.33 kHz (RX only) |
| Emission Type | TX: AM RX: AM & FM | TX: AM RX: AM & FM (FM: for receiving the Weather Channels, USA version only) | TX: AM RX: AM & FM (FM: for receiving the Weather Channels, USA version only) |
| Supply Voltage | 4.5 - 15.0 VDC | 6.0-15.0 V DC | 6.0 - 15.0 V DC |
| Current Consumption | 250 μ A (Power off) 35 mA (Battery saver on, save ratio 1:5) 60 mA (Squelch on) 180 mA (Receive) 800 mA (Transmit AM: 1.5W Carrier @ 7.4V) 400 mA (Transmit AM: 0.3W Carrier @ 4.5V) | 20 μ A (Power off) 20 mA (Battery saver on, saver ratio 1:5) 60 mA (Squelch on) 270 mA (Receive) 0.9 A (Transmit 1.5 W Carrier) | 250 μ A (Power off) 35 mA (Battery saver on, saver ratio 1:5) 60 mA (Squelch on) 200 mA (Receive) 850 mA (Transmit 1.5 W Carrier) |
| Temperature Range | -22°F to +140°F (-30°C to +60°C) | +14°F to +140°F (-10°C to +60°C) | +14 °F to +140°F (-10°C to +60°C) |
| Antenna Connector | BNC Type | BNC Type | BNC Type |
| Case Size (WxHxD) | 2.36" x 3.78" x 1.12" (60 x 96 x 28.5 mm) w/FNB-80LI | 2.4" x 4.7" x 1.2" (60 x 120 x 32 mm) w/FNB-83 | 2.36" x 4.09" x 1.2" (60 x 104 x 30.5 mm) w/o knob & antenna |
| Weight (approx.) | 9.9 oz. (280 g) with FNB-80LI and antenna | 13.7 oz (390 g) with FNB-83 and antenna | 12.7 oz (360 g) with FNB-83, antenna, and belt clip |
| Receiver | | | |
| Circuit Type | Double-conversion Superheterodyne | Double-conversion Superheterodyne | Double-conversion Superheterodyne |
| IFs | 35.4 MHz & 450 kHz (AM/NFM) 45.65 MHz & 10.7 MHz (WFM) | 35.4 MHz & 450 kHz | 47.25 MHz & 450 kHz |
| Sensitivity | 88-108 MHz: Better than 2 μ V (for 12 dB SINAD with 1 kHz tone @ 22.5 kHz deviation) 108 MHz-136.975 MHz: Better than 1 μ V (for 6 dB S/N with 1 kHz tone @ 30 % modulation) BRS-01 - BRS-21: Better than 0.32 μ V (for 12 dB S/N with 1 kHz tone @ 3.5 kHz deviation) WX-01 - WX-10: Better than 0.4 μ V (for 12 dB S/N with 1 kHz tone @ 3.5 kHz deviation) | Better than 0.8 μ V (for 6 dB S/N with 1 kHz, 30 % modulation) | AM: Better than 0.8 μ V (for 6 dB S/N with 1 kHz, 30 % modulation) FM: Better than 0.4 μ V (for 12 dB SINAD) |
| Selectivity | AM/FM: More than 8 kHz/ -6 dB WFM: More than 200 kHz/ -6 dB | More than 8 kHz/-6 dB | More than 8 kHz/-6 dB |
| Adjacent CH. Selectivity | AM/FM: Less than 25 kHz/ -60 dB WFM: Less than 300 kHz/ -20 dB | Less than 25 kHz/-60 dB | Less than 25 kHz/-60 dB |
| AF Output (Internal speaker) | 0.4W @ 8 Ohms, 10 % THD @13.8 V | 0.8 W @ 16 Ohms, 10 % THD | 0.7 W @ 16 Ohms, 10 % THD |
| Transmitter | | | |
| Power Output | 5.0 W (PEP), 1.5 W (Carrier Power) @ 7.4 V DC | 5.0 W (PEP), 1.5 W (Carrier Power) @ 7.2 V DC | 5.0 W (PEP), 1.5 W (Carrier Power) @ 7.2 V DC |
| Frequency Stability | Better than \pm 2.5 ppm (-22°F to +140°F, -30°C to +60°C) | Better than \pm 10 ppm (+14°F to +140°F, -10°C to +60°C) | Better than \pm 10 ppm (+14°F to +140°F, -10°C to +60°C) |
| Modulation System | Low Level Amplitude Modulation | Low Level Amplitude Modulation | Low Level Amplitude Modulation |
| Spurious Emission | > 60 dB below carrier | > 60 dB below carrier | > 60 dB below carrier |
| Int. Microphone Type | Condenser | Condenser | Condenser |
| Ext Mic. Impedance | 150 Ohms | 150 Ohms | 150 Ohms |

Specifications are subject to change without notice or obligation.

About this brochure: We have made this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time in equipment, optional accessories, specifications, model numbers, and availability. Precise frequency range may be different in some countries. Some accessories shown herein may not be available in some countries. Some information may have been updated since the time of printing; please check with your Authorized YAESU Dealer for complete details.

YAESU
The radio

— **YAESU MUSEN CO., LTD.** <http://www.yaesu.com/jp> —

Tennozu Parkside Building
2-5-8 Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-0002, Japan

— **YAESU USA** <http://www.yaesu.com/airband/> —

US Headquarters 6125 Phyllis Drive, Cypress, CA 90630, U.S.A.

— **YAESU UK** <http://www.yaesu.co.uk> —

Unit 12, Sun Valley Business Park, Winnall Close
Winchester, Hampshire, SO23 0LB, U.K.

— **YAESU HK** <http://www.yaesu.com.hk> —

Unit 2002, 20/F, 9 Chong Yip Street,
Kwun Tong, Kowloon, Hong Kong

