


FT-450 Foot Kit

The FT-450 Foot Kit allows elevating the front panel of the transceiver for easy viewing.

SUPPLIED ITEMS


The following items are shipped with this kit:

- ① Front Foot (R3086890B) 2 pcs
- ② Front Foot Stand (R3086910C) 2 pcs
- ③ Foot Rubber (R7088070A) 2 pcs
- ④ Screw M3x6B (U20306007) 2 pcs
- ⑤ Hex Nut N3 (U60300301) 2 pcs

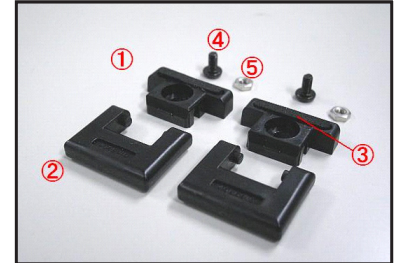


INSTALLATION

- Cut off the two projections on each Front Foot using a pair of wire cutters (two points for each Front Foot).
- Assemble the Front Foot and Front Foot Stands, and then affix a Foot Rubber to each Front Foot Stand.

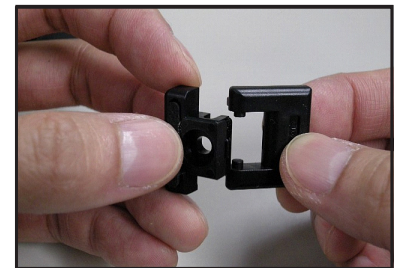

- Remove the two screws from each side of the transceiver and four screws from the Bottom Case of the transceiver, and then remove the Bottom Case.
- Remove the original Front Feet from the Bottom Case, by using a small pointed tool to press the center pins out of the nylon rivets to release the feet.

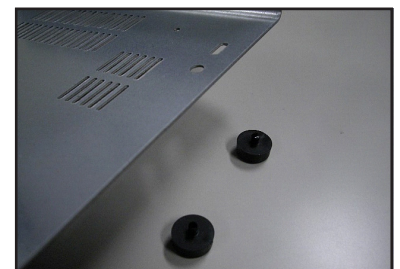

- Install the assembled Front Feet and Stands using the supplied Screws (M3x6B) and Hex Nuts (N4).

Important Note! In the above step, insert the Screws from the inside of the Bottom Case and attach the Hex Nuts from the Front Foot side.



- Apply a drop of adhesive to each Hex Nut to prevent loosening. (Allow the adhesive to dry before placing the radio on your desk).
- Replace the Bottom Case with eight screws.
- The installation is now complete.